


DP-30K Differential Probe

SPECIFICATIONS:

FUNCTION / MODEL	DP-30K
Differential Voltage DC + AC peak	Max. 15 KV DC or 10 KV RMS / 60 Hz
Bandwidth	75 MHz(20 MHz at X2000)
Common Mode Voltage	Max. 15 KVp-p or 7.5 KV DC or 5 KV RMS
Common Mode Voltage RMS CAT II / CAT III	5 KV RMS
Attenuation (Switchable)	X200, X2000
Input R (Each Input)	41 MΩ ± 2%
Input C (Each Input)	2 PF ± 5%
Input Impedance (Between Input)	82 MΩ // 1 PF
Maximum Operation Voltage	≤ ± 1.5 KV DC or 1.1 KV RMS at X200 ≤ ± 15 KV DC or 7 KV RMS at X2000
Common Mode Rejection Ratio (CMRR)	60 Hz: > 10000 : 1 100 Hz: > 1000 : 1 1 MHz: > 300 : 1
Noise (Into 50Ω Load)	≤ 1.0m V RMS
Accuracy (at 20~30°C 70%RH after 20 minutes)	≤ ± 2%
Maximum Output Voltage	≤ ± 8 V
Power Source	External DC 5 V / 2 A Adaptor
Other	Over Range Indicate



ACCESSORIES:

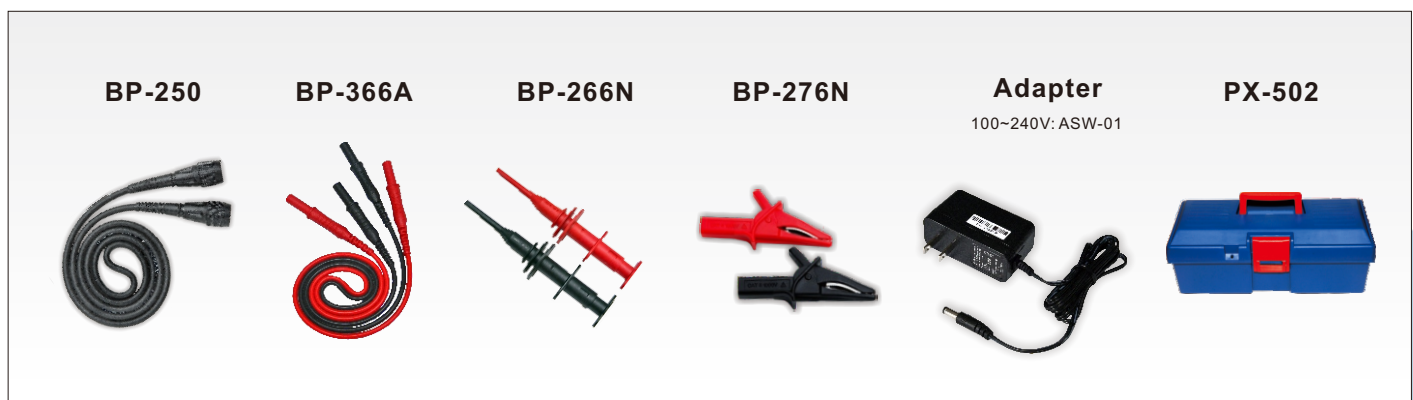

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

SALES AGENT