


EL-820P Programable Electronic Load With USB

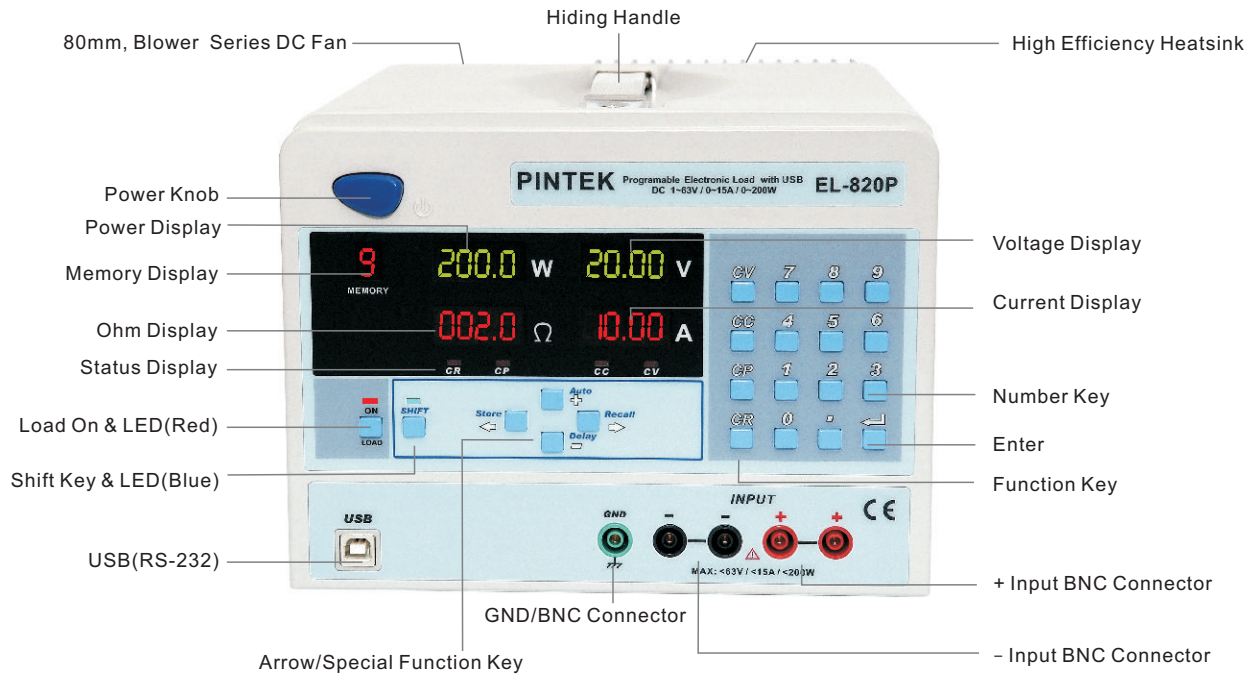

SPECIFICATIONS

Operation Limit	Voltage	1 ~ 63V
	Current	10mA ~ 15A
	Power	200W
Constant Voltage	Range	1 ~ 63V
	Accuracy	$\pm (1\% + 20mV)$
	Resolution	20mV
Constant Current	Range	10mA ~ 15A
	Accuracy 10mA ~ 1A / 1A ~ 6A / 6A ~ 15A	$\pm (0.5\% + 1mA) / \pm (0.5\% + 10mA) / \pm (1\% + 100mA)$
	Resolution 10mA ~ 1A / 1A ~ 15A	1mA / 10mA
Constant Power	Range	1 ~ 200W
	Accuracy	$\pm 1\% + 0.2W$
	Resolution	0.1W
Constant Resistance	Range	0.5~999 Ω
	Accuracy	$\pm 1\% + 0.2\Omega$
	Resolution	0.1 Ω
Voltage Read Back	Accuracy	$\pm 1\% + 50mV$
	Resolution	20mV
Current Read Back	Accuracy	$\pm 1\% + 10mA$
	Resolution	10mA
Memory	Save address	1 ~ 9
Timer	Range	1 ~ 999999
	Resolution	1 sec
Power Source	100V, 110V, 120V, 220V, 240V, 250V 50/60Hz	

PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan

Tel: 886-2-86859562~3 ; 886-2-86861898

Fax: 886-2-86852081 ; 886-2-86861114

<http://www.pintek.com.tw>

E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

CE

SALES AGENT